


For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

219 Series Hex Countersink Pipe Plug

Use: For use with water, grease, fuels, LP and Natural Gas, refrigeration, instrumentation, and hydraulic systems in low and medium pressure pipe line connections. Use in combination with brass, copper, and iron pipe.

Design Features:



Operating Specifications:

Temperature: -65° to 250° F

Working Pressure: 1200 PSI Maximum

Vibration: Fair resistance to vibration and pipe movement depending on conditions

FITTING MATERIAL SPECIFICATIONS


Body	Low-lead brass
-------------	----------------

Part Listing:

<input type="checkbox"/>	219-2X	1/8" MIP
<input type="checkbox"/>	219-2X B	1/8" MIP, bulk
<input type="checkbox"/>	219-4X	1/4" MIP
<input type="checkbox"/>	219-4X B	1/4" MIP, bulk
<input type="checkbox"/>	219-6X	3/8" MIP
<input type="checkbox"/>	219-6X B	3/8" MIP, bulk
<input type="checkbox"/>	219-8X	1/2" MIP
<input type="checkbox"/>	219-8X B	1/2" MIP, bulk

PART DIMENSIONS (Inches)

Model	DIM. A	HEX. B
219-2X	.31	3/16
219-4X	.46	1/4
219-6X	.46	5/16
219-8X	.61	3/8

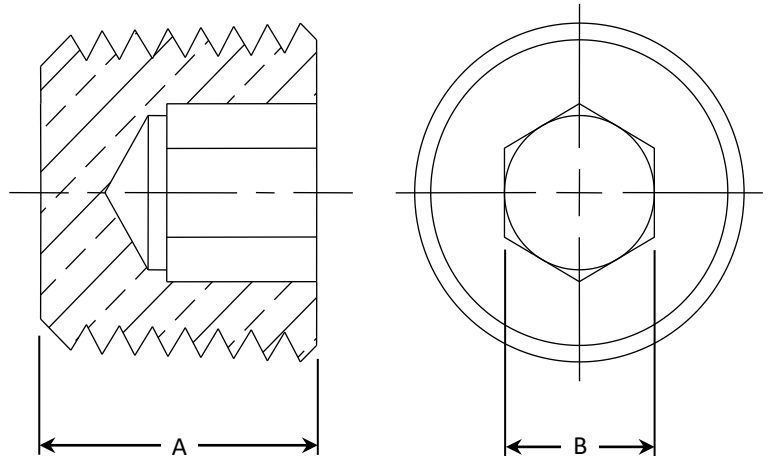

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.219 219 Series Hex Countersink Pipe Plug REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company