

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

WC33 7/8" OD (Copper Sweat) Water Heater Connectors

Use: For use in exposed locations only to connect water heaters and other water connected devices to the water supply

Design Features:



Operating Specifications:


Temperature: 40° to 180° F (NSF61 maximum 82° C)
Pressure: water pressures up to 125 PSI maximum

CONNECTOR MATERIAL SPECIFICATIONS	
Tubing	Copper
Sleeve	Plastic

PART DIMENSIONS (Inches)					
Connector Length (±.25)					
Model	Dim.	12"	15"	18"	24"
WC33	A	11.25	14.25	17.25	23.25

Part Listing:

- WC33-12 3/4" nom male sweat (7/8" OD) x 3/4" nom male sweat (7/8" OD) x 12" length
- WC33-15 3/4" nom male sweat (7/8" OD) x 3/4" nom male sweat (7/8" OD) x 15" length
- WC33-18 3/4" nom male sweat (7/8" OD) x 3/4" nom male sweat (7/8" OD) x 18" length
- WC33-24 3/4" nom male sweat (7/8" OD) x 3/4" nom male sweat (7/8" OD) x 24" length

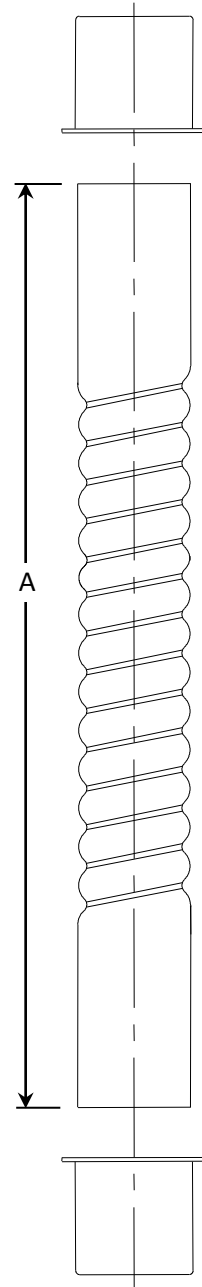

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®