

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

WC43 7/8" OD Copper Water Heater Connectors – Female Sweat x Male Sweat

Use: For use in exposed locations only to connect water heaters and other water connected devices to the water supply.

Design Features:



Operating Specifications:

Temperature: 40° to 180° F (maximum 82° C)
Pressure: water pressures up to 125 PSI maximum




CONNECTOR MATERIAL SPECIFICATIONS	
Tubing	Copper
Plug / Cap	Plastic

PART DIMENSIONS (Inches)					
Connector Length (±.25)					
Model	Dim.	12"	15"	18"	24"
WC43	A	11.25	14.25	17.25	23.25

Part Listing:

- ☐ WC43-12 3/4" nom female sweat (7/8" ID) x 3/4" nom male sweat (7/8" OD) x 12" length
- ☐ WC43-15 3/4" nom female sweat (7/8" ID) x 3/4" nom male sweat (7/8" OD) x 15" length
- ☐ WC43-18 3/4" nom female sweat (7/8" ID) x 3/4" nom male sweat (7/8" OD) x 18" length
- ☐ WC43-24 3/4" nom female sweat (7/8" ID) x 3/4" nom male sweat (7/8" OD) x 24" length

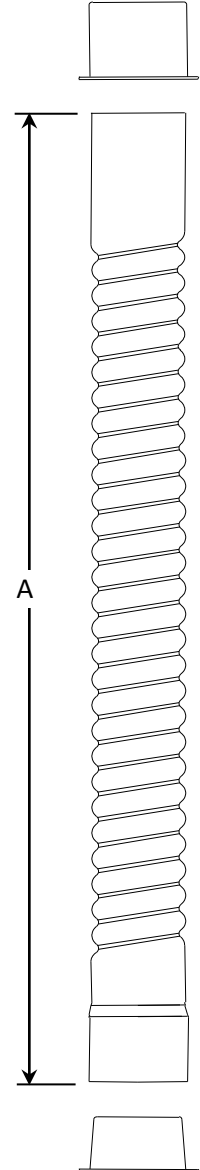

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®