

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

PRV Series Pressure Relief Valve – Male Iron Pipe x Female Iron Pipe

Use: A pressure only safety relief valve designed specifically for the protection of hot water supply systems.


Design Features:

- **Built in port** reduces the number of connections required.
- **100% performance tested.**
- **No-lead brass material** meets compliance for safe drinking.

Operating Specifications:

Temperature: 33° - 250°F

Pressure: 150 PSI maximum

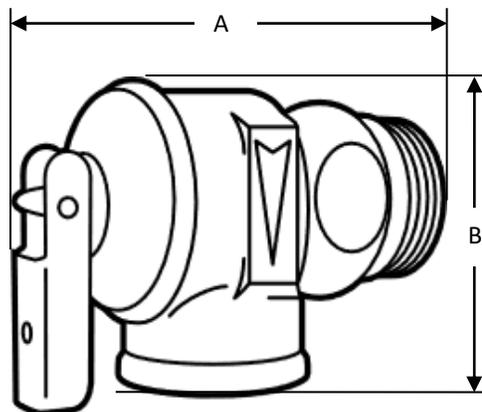

VALVE MATERIAL SPECIFICATIONS	
Body	Forged brass
Retainer	Stainless steel
Seat	Silicone
O-Rings	High-temperature rubber
Lift Lever	Aluminum
Pin	Stainless steel
Name Plate	Aluminum

PART DIMENSIONS (Inches)		
Model	DIM A	DIM B
PRV-R2X	2.79	1.87

Part Listing:

- PRV-R2X 3/4" MIP to Service Valve x 3/4" FIP to Drain Pipe (200K BTU), Rough Brass

Listings and Certifications:

- CSA listed to ANSI Z21.22 / CSA 4.4
- CSA listed to NSF/ANSI/CAN 372
- Listed by The National Board of Boiler and Pressure Vessel Inspectors to ASME Section XIII HV



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft®