

*For Residential and Commercial Applications*

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## S1-\*\*DL Stainless Steel Flexible Braided Toilet Water Connector - Compression Inlet

**Use:** For use in potable water distribution systems in accessible locations only


**Design Features:**

- **Tough inner core** is reinforced to resist chlorine and chloramine leaching and deterioration
- **Plated brass nuts** for durability
- **Rubber washer** ensures a universal fit and long lasting water-tight connection
- **8-sided pneumatic crimp** ensures reliable nut-to-hose connection
- **No Lead**

**Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F  
**Pressure:** 125 PSI maximum

**Tubing Diameter:** 0.300" ID (0.550" OD)

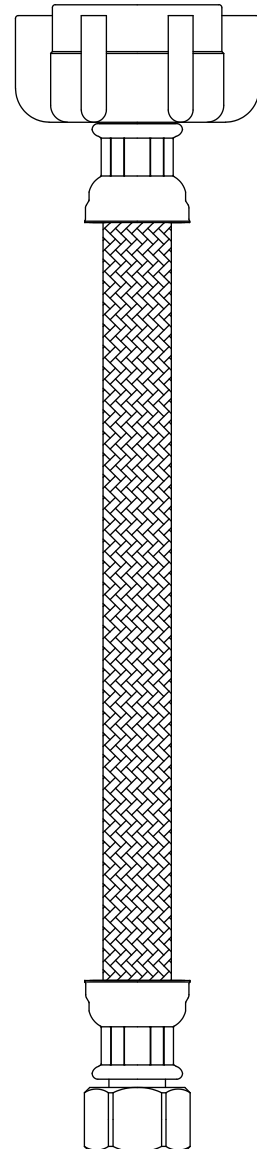

MATERIAL SPECIFICATIONS	
<b>Inner Hose</b>	Reinforced PVC
<b>Braiding</b>	Stainless steel wire
<b>Barb</b>	Brass
<b>Ferrule</b>	Zinc plated steel
<b>Nut</b>	Plastic
<b>Washer</b>	Rubber
<b>Compression Nut</b>	Brass


**Part Listing:**

- S1-9DL F      3/8" compression x 7/8" ballcock x 9" length
- S1-12DL F     3/8" compression x 7/8" ballcock x 12" length
- S1-12DLM F    3/8" compression x 7/8" ballcock w/metal nut x 12" length
- S1-16DL F     3/8" compression x 7/8" ballcock x 16" length
- S1-20DL F     3/8" compression x 7/8" ballcock x 20" length
- S8-12DL F     1/2" FIP x 7/8" ballcock x 12" length
- S8-16DL F     1/2" FIP x 7/8" ballcock x 16" length
- S8-20DL F     1/2" FIP x 7/8" ballcock x 20" length

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.*



# S1-\*\*DL Stainless Steel Flexible Braided Toilet Water Connector - Compression Inlet

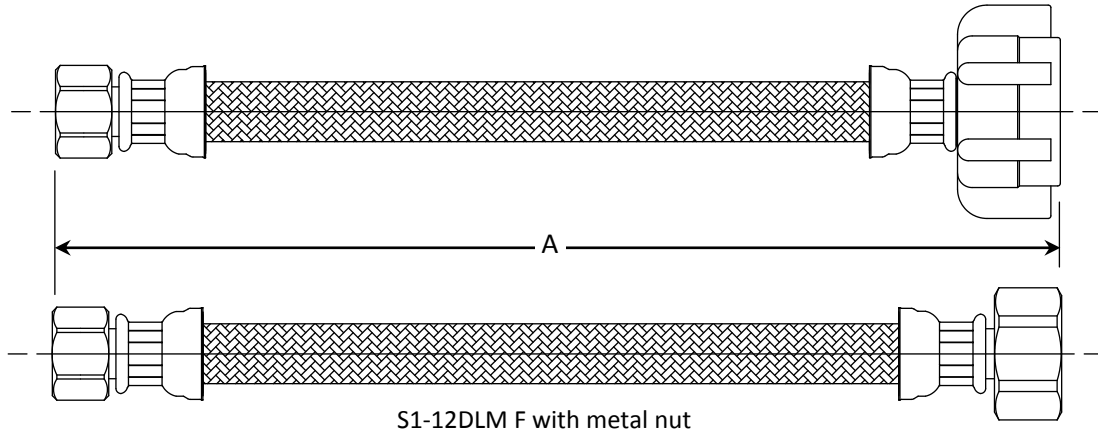

<b>PART DIMENSIONS (Inches)</b>	
<b>Model</b>	<b>Dim. A</b>
S1-9DL	9.0 / 10.0
S1-12DL	12.0 / 13.0
S1-12DLM	12.0 / 13.0
S1-16DL	16.0 / 17.0
S1-20DL	20.0 / 21.0
S8-12DL	12.0 / 13.0
S8-16DL	16.0 / 17.0
S8-20DL	20.0 / 21.0

### Listings & Certifications:

- CSA listed to ASME A112.18.6 and CSA B125.6 (File #204593)
- IAPMO listed to ASME A112.18.6 and CSA B125.6 (File # 0452)
- No Lead product CSA listed to Low Lead Content Certification Program – Plumbing Products Class 6853-01
- Tubing material is formulated with food grade ingredients and certified by NSF to standard 51 Food Equipment Materials



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.*

**BrassCraft**<sup>®</sup>