

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

STR19X Multi-Turn Angle Stop w/Loose Key & Stuffing Box – Sweat x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation water systems/continuous use temperatures above 115° F. For those applications, use our KT™ series ball stops.

Design Features:


- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Large loose key handle** provides a secure grip for trouble-free on/off operation
- **Removable loose key handle** helps protect against accidental stop operation during rough-ins and general use



Operating Specifications:

Temperature: 40° - 160° F

Pressure: 125 PSI maximum

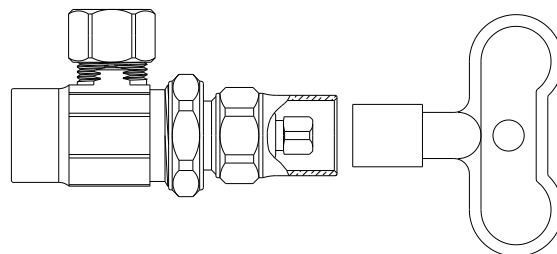


Excludes loose
key handle

PART DIMENSIONS (Inches)

Model	Dim. A	Dim. B	Dim. C
STR19X	1.42	1.01	2.61

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Lock Shield Stem	Brass
Bib & Packing Washers	Nitrile or EPDM rubber
Packing Nut	Brass, plated
Loose Key	Zinc die cast
Compression Sleeve	Brass
Compression Nut	Brass, plated

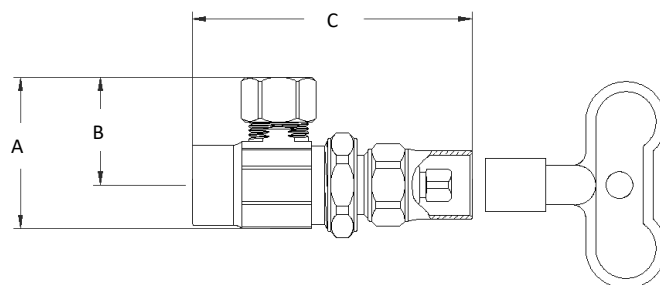

Part Listing:

- ☐ STR19X C 1/2" sweat x 3/8" OD compression w/loose key & stuffing box, chrome plated

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.199 STR19X Multi-Turn Angle Stop w/Loose Key-Stuff Box-Sweat x Comp REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company