Job Name: Engineer/Architect: Job Location: Wholesaler: Submittal Date: Contractor:

For Residential and Commercial Applications

KTSR19X 1/4 Turn Angle Ball Stop w/ Loose Key – Sweat x Compression

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- Precision-machined brass ball is specially engineered and mated with PTFE seats to provide smooth operation
- Two high-performance o-rings withstand high temperatures and corrosion
- Machined one-piece brass body provides strength, durability, and long-lasting performance
- Blow-out proof brass stem is assembled from the inside out with two o-rings to ensure safe, reliable performance
- Plated stem provides corrosion resistance and prevents o-ring damage
- 100% leak tested




Operating Specifications:

Temperature: 40°- 180° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS				
Body	Brass, plated			
Stem	Brass, plated			
Seat	PTFE			
Ball	Brass, plated			
O-ring	Rubber			
Loose Key Stem	Zinc die cast, plated			
Lock Shield	Brass, plated			
Loose Key	Zinc die cast, plated			
Compression Sleeve	Brass			
Compression Nut	Brass, plated			

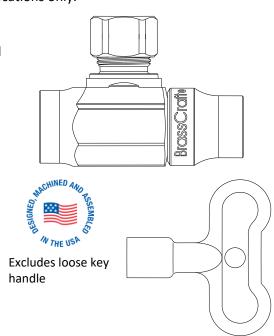


Part Listing:

l		KTSR19X C	1/2"	nom sweat x 3	/8" OD	compression	, chrome	plated
---	--	-----------	------	---------------	--------	-------------	----------	--------



KTSR19X 1/4 Turn Angle Ball Stop w/ Loose Key – Sweat x Compression

PART DIM	PART DIMENSIONS (Inches)					
Model	DIM. A	DIM. B				
KTSR19X	1.21	2.12				

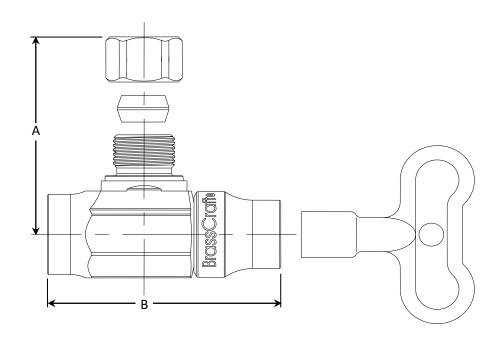

Listings & Certifications:

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

