For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

OFR1711EX Copper Toilet Supply Kit w/ Multi-Turn Angle Stop – Female Iron Pipe x Flare

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT™ series ball stop supply kits.

Design Features:

 Everything you need. These kits combine our trusted supply stop, copper riser, escutcheon, and (optional) 3" nipple, for an easy-to-install connection



Copper riser provides:

- One-piece construction
- Cut-to-Length for clean, professional installation

Multi-turn stop provides:


- Machined one-piece brass body provides strength, durability, and long-lasting performance
- Oval knurled handle provides a secure grip and smooth on/off operation
- Easy-to-remove handle with screw attachment helps protect against accidental stop operation during rough-ins

Operating Specifications:

Temperature: 40°-160° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.38" OD or 0.50" OD

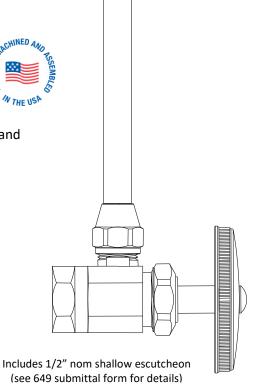

CONNECTOR MATERIAL SPECIFICATIONS		
Tube	Copper	
Washer	Rubber	
Ring	Brass	

Escutcheon	Stainless steel

STOP MATERIAL SPECIFICATIONS				
Body	Brass, plated			
Stem	POM			
Bib & Packing Washers	Rubber			
Packing Nut	Brass, plated			
Handle	ABS, plated			
Handle Screw	Steel, zinc plated			
Flare Nut	Brass, plated			

This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to BrassCraft Mfg. Co. if requested.



OFR1711EX Copper Toilet Supply Kit w/ Multi-Turn Angle Stop – Female Iron Pipe x Flare

Part Listing:

OFR1711EX C

1/2" FIP x 3/8" OD flare multi-turn stop with 3/8" OD tube x 11" length copper riser, shallow escutcheon, chrome

PART DIM	ENSIONS (Inches)	
Model	DIM. A	DIM. B	
OFR1711EX	12.00	2.55	

Listings & Certifications:

 IAPMO listed to ASME A112.18.1/CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)







This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to BrassCraft Mfg. Co. if requested.

