

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

TR10/12X Multi-Turn Straight Stop w/ Stuffing Box – Female Iron Pipe x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use of temperatures above 115°F. For those applications, use our KT™ series ball stop.

Design Features:


- **Machined one-piece brass body** provides strength, durability, and long-lasting performance
- **Oval knurled handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment protects accidental stop operation during rough-ins



Operating Specifications:


Temperature: 40° - 160° F

Pressure: 125 PSI maximum

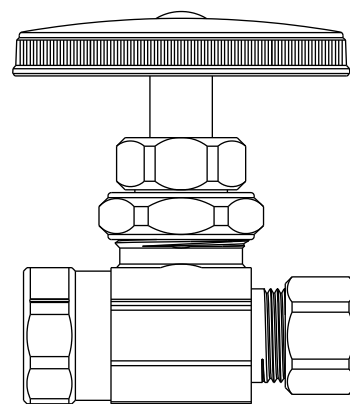

STOP MATERIAL SPECIFICATIONS	
Body	Brass, plated
Stem	POM or Brass
Bib & Packing Washers	Rubber
Packing Nut & Stuffing Box	Brass, plated
Handle	Zinc, die cast; ABS, plated; or polycarbonate
Handle Screw	Zinc-plated steel
Compression Sleeve	Brass
Compression Nut	Brass, plated

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
TR10X	1.98	1.71/1.93
TR12X	2.07	1.76/1.98

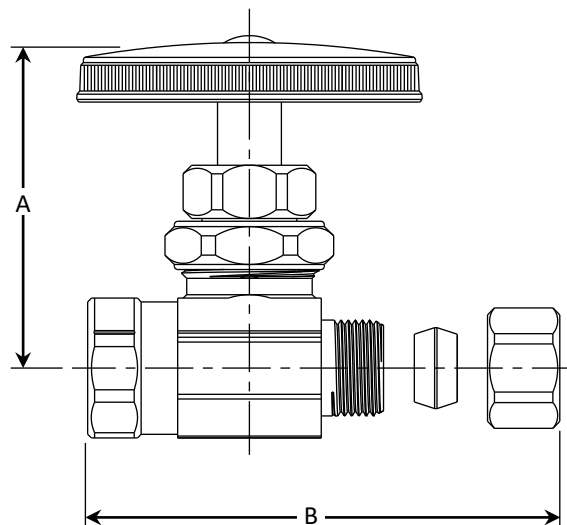

Part Listing:

- ☐ TR10X C 3/8" FIP x 3/8" OD compression with stuffing box, chrome plated
- ☐ TR12X C 1/2" FIP x 3/8" OD compression with stuffing box, chrome plated

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

BrassCraft®