For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

CEPX04/14X Multi Turn Straight Stop - Cold Expansion Barb (for PEX) x Compression

Use: For use in potable water distribution systems in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KTTM series ball stop.

Design Features:

- Machined, one-piece brass body provides strength, durability, and long-lasting performance
- Easy-to-remove handle with screw attachment helps protect against accidental operation during rough-ins
- PEX end designed to ASTM F1960
- For use with ASTM F876 PEX tubing, in ASTM F877 water distribution systems




Operating Specifications:

Temperature: 40°-160° F

Pressure: 125 PSI maximum

STOP MATERIAL SPECIFICATIONS				
Body	Brass, plated			
Stem	POM			
Bib & Packing Washer	Rubber			
Handle	ABS, plated or polycarbonate			
Handle Screw	Steel, zinc plated			
Compression Nut	Brass, plated			
Packing Nut	Brass, plated			
Compression Sleeve	Brass			

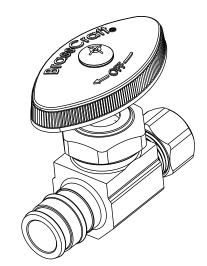




Part Listing:	•
---------------	---


CEPX04X C	1/2" nom cold expansion barb (for PEX) inlet x 1/4" OD compression, chrome
CEPX14X C	1/2" nom cold expansion barb (for PEX) inlet x 3/8" OD compression, chrome
CEPX14L1X CB	1/2" nom cold expansion barb (for PEX) inlet x 3/8" OD compression, chrome, less nut
	and sleeve, bulk

BrassCraft_®

CEPX04/14X Multi Turn Straight op - Cold Expansion Barb (for PEX) x Compression

PART DIMENSIONS (Inches)					
Model	DIM. A	DIM. B	DIM. C		
CEPX04X	1.77	2.15	1.09		
CEPX14X	1.77	2.22	1.09		
CEPX14L1X	1.77	1.93	1.09		

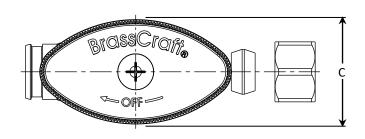

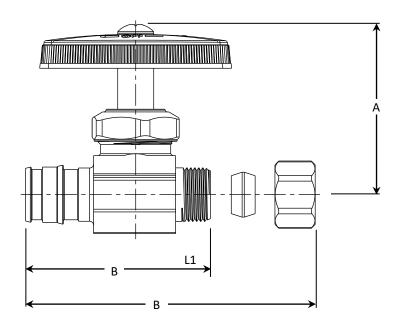

Listings & Certifications:

 IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI372 & NSF61)





