


# For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## TR15X Multi-Turn Angle Stop w/ Stuffing Box – Female Iron Pipe x Compression

**Use:** For use in potable water distribution systems. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use BrassCraft KT series ball stops



### Design Features:

- **Machined one-piece brass body** provides strength, durability and long-lasting performance
- **Oval knurled handle** provides a secure grip and smooth on/off operation
- **Easy-to-remove handle** with screw attachment protects accidental stop operation during rough-ins
- 

### Operating Specifications:

**Temperature:** 40° - 160° F

**Pressure:** 125 PSI maximum

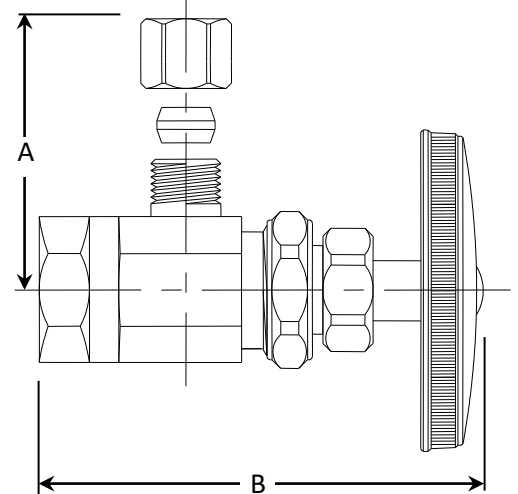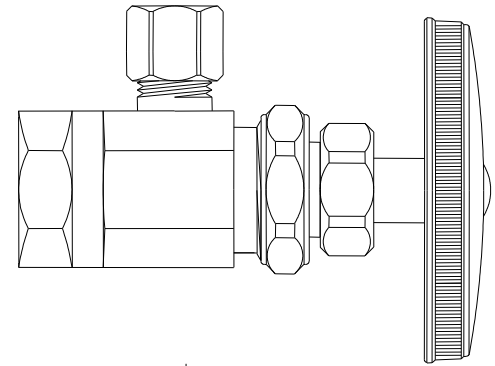

STOP MATERIAL SPECIFICATIONS	
<b>Body</b>	Brass, plated
<b>Stem</b>	POM or brass
<b>Bib &amp; Packing Washers</b>	Nitrile or EPDM rubber
<b>Packing Nut &amp; Stuffing Box</b>	Brass, plated
<b>Handle</b>	Zinc die cast, plated; ABS, chrome plated; or polycarbonate
<b>Handle Screw</b>	Steel, zinc plated
<b>Compression Sleeve</b>	Brass
<b>Compression Nut</b>	Brass, plated

### PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B
TR15X	1.02	2.60

### Part Listing:

- ☐ TR15X C 3/8" FIP x 3/8" OD compression with stuffing box, chrome plated

### Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.41 TR15X Multi-Turn Angle Stop w/ Stuffing Box - FIP x Comp REV 9.19

**BrassCraft**

©2019 Brasscraft Manufacturing Company