

Job Name: \_\_\_\_\_ Engineer/Architect: \_\_\_\_\_  
 Job Location: \_\_\_\_\_ Wholesaler: \_\_\_\_\_  
 Submittal Date: \_\_\_\_\_ Contractor: \_\_\_\_\_

## G2PS14X 1/4 Turn Push Connect Straight Stop - Compression Outlet


**Use:** For use in potable water distribution systems in accessible locations only. Not intended for recirculation systems/continuous use temperatures above 115°F. For those applications, use our KT™ series ball stop.

### Design Features:

- **Compatible with** PEX, copper and CPVC.
- **Pre-inserted tube stiffener** is “installation ready” for a faster connection.
- **Compact machined** one-piece body design.
- **Fast, reliable secure.**
- **Smooth** 1/4 turn operation.
- **100% leak tested.**
- **No-lead brass material** meets compliance for safe drinking.

### Operating Specifications:

**Temperature:** 40° - 160°F  
**Pressure:** 125 PSI maximum

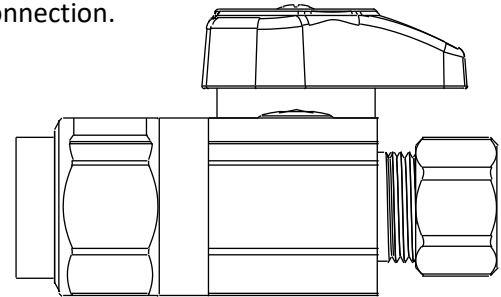

### STOP MATERIAL SPECIFICATIONS


<b>Body</b>	Brass, plated
<b>Stem Barrel</b>	TPE
<b>Stem Shaft</b>	Glass-filled polypropylene
<b>Stem O-ring</b>	EPDM
<b>Gripper Ring</b>	Stainless steel
<b>Push connect O-ring</b>	EPDM
<b>Tube Stiffener</b>	POM
<b>Removal Collet</b>	Glass-filled nylon
<b>Handle</b>	ABS, plated or zinc die cast, plated
<b>Screw</b>	Steel, zinc plated
<b>Compression Nut &amp; Sleeve</b>	Brass

### PART DIMENSIONS (Inches)

Model	DIM. A	DIM. B
G2PS14X	1.03	2.45

### Part Listing:

- ☐ G2PS14X C 1/2" Nom Push Connect x 3/8" OD  
 Compression, Chrome Plated

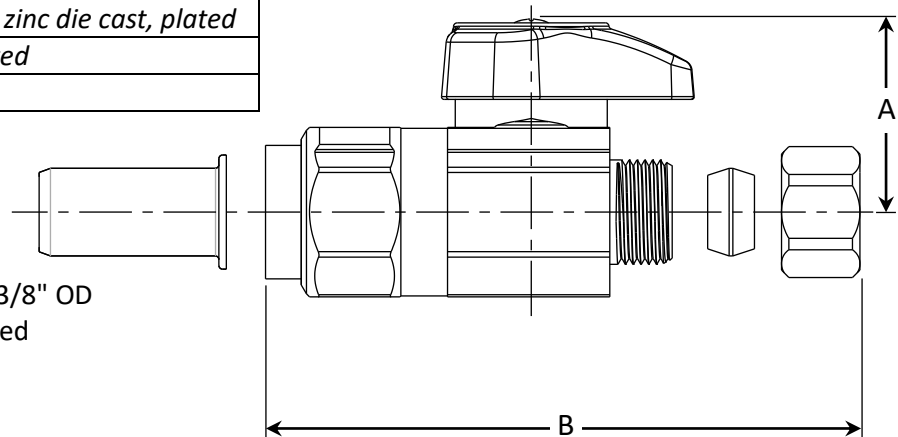

### Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1  
 (includes NSF/ANSI 372 and NSF/ANSI/CAN 61)



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

*\*Products shown may differ from those available in the Canadian market.*