

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

WD55/65 Kwik-In Copper Water Connector

Use: For use in accessible locations only to connect water heaters and other water connected devices to the water supply

Design Features:



Operating Specifications:

Temperature: 40° to 180° F (maximum 82° C)


Water Pressure: 125 PSI maximum

CONNECTOR MATERIAL SPECIFICATIONS	
Tubing	Copper
Shipping Cap	Plastic

PART DIMENSIONS (Inches)					
Connector Length (±.50)					
Model	Dim.	12"	15"	18"	24"
WD55	A	----	15.50	----	----
WD65	A	----	15.50	----	----

Part Listing:

- ☐ WD65-15 1/2" nom female sweat (5/8" ID) x 1/2" nom male sweat (5/8" OD) x 15" length connector

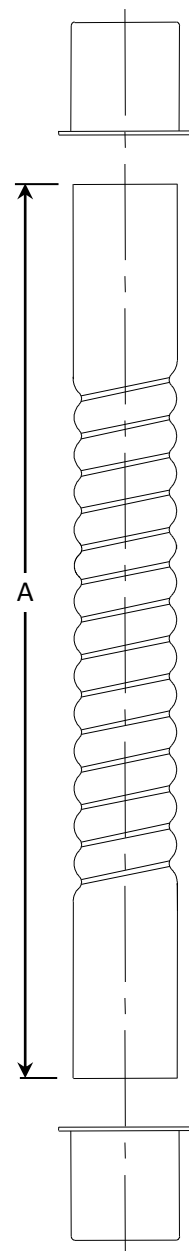

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

300.57 WD55.56 Kwik-In Copper Water Connector REV 9.19

BrassCraft®

©2019 Brasscraft Manufacturing Company