

For Residential and Commercial Applications

Job Name:

Engineer/Architect:

Job Location:

Wholesaler:

Submittal Date:

Contractor:

B8-**A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet

Use: For use in potable water distribution systems in accessible locations only.

Design Features:

- **Engineered polymer braided** fibers bend freely without kinking or crimping
- **Reinforced PVC inner hose** provides added durability
- **Rubber washers** provide a large pliable sealing surface and ensure a long lasting water-tight connection




Operating Specifications:

Temperature: 40°- 160° F, intermittent to 180° F

Pressure: 125 PSI maximum

Tubing Diameter: 0.300" ID (0.550" OD)

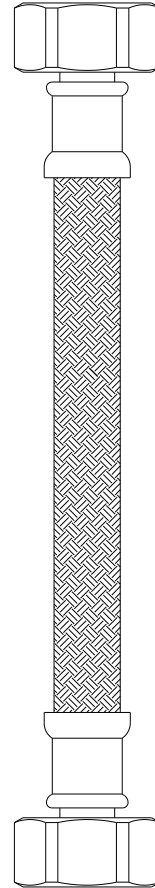

CONNECTOR MATERIAL SPECIFICATIONS

Inner Hose	Reinforced PVC
Braiding	PVC coated yarn
Barb	Brass
Ferrule	Stainless steel
Nut	Brass, plated or polypropylene
Washer	Rubber

Part Listing:

- | | | |
|--------------------------|----------|------------------------------------|
| <input type="checkbox"/> | B8-16A F | 1/2" FIP* x 1/2" FIP* x 16" length |
| <input type="checkbox"/> | B8-20A F | 1/2" FIP* x 1/2" FIP* x 20" length |
| <input type="checkbox"/> | B8-24A F | 1/2" FIP* x 1/2" FIP* x 24" length |
| <input type="checkbox"/> | B8-30A F | 1/2" FIP* x 1/2" FIP* x 30" length |
| <input type="checkbox"/> | B8-36A F | 1/2" FIP* x 1/2" FIP* x 36" length |
| <input type="checkbox"/> | B8-36MP | 1/2" FIP* x 1/2" MIP x 36" length |
| <input type="checkbox"/> | B8-48A F | 1/2" FIP* x 1/2" FIP* x 48" length |

*1/2" FIP also fits 7/16" rubber slip nut


This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.

400.336 B8 SPP Braided Faucet Connector - FIP Inlet REV 7.19

BrassCraft®

©2019 Brasscraft Manufacturing Company

B8-A Speedi Plumb® PLUS Braided Faucet Connectors - Female Iron Pipe Inlet**

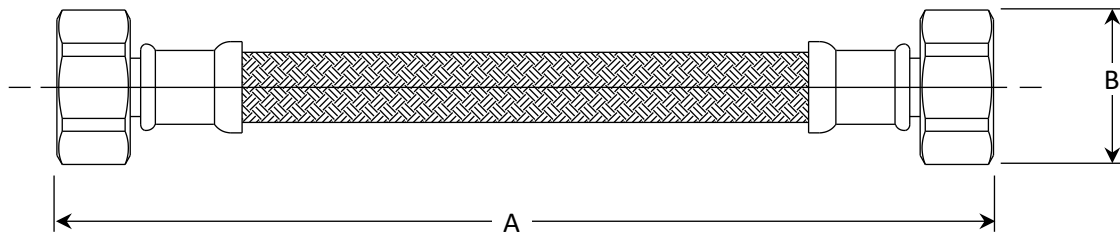

PART DIMENSIONS (Inches)		
Model	DIM. A	DIM. B
B8-16A	16.0 / 17.0	1.02
B8-20A	20.0 / 21.0	1.02
B8-24A	24.0 / 25.0	1.02
B8-30A	30.0 / 31.0	1.02
B8-36A	36.0 / 37.0	1.02
B8-36MP	36.0 / 37.0	1.02
B8-48A	48.0 / 49.0	1.02

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Co., and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.